

150M 4G LTE Mifi Router




Hardware Info	
Frequency	LTE FDD : B1/3 (B2/4/5/7/8/12/17/20 optional)
	LTE TDD : B38/39/40/41
	UMTS : 900 / 2100 MHz
	GSM: 850/900/1800/1900Mhz
Peak rate	LTE FDD : 150M DL and 50Mbps UL (Cat4)
LCD	TFT 1.44 Inch 128*128
Button	1 Power 1 WPS ON/OFF
WIFI	802.11 b/g/n
Battery	2100mAhLion
Port	1 * Standard USIM 1*Micro SD 1 * Micro USB
Antenna	Internal 1*WIFI 2*LTE
Charger	Output : 5V DC±10%; Output : 1A Input : 100V~240V,50Hz~60Hz
Working Temperature	-10°C to 45°C
Working Humidity	5% - 65%
Storage Temperature	-30°C to 80°C
Storage Humidity	5% to 95%
Software Info	
OS	Win7, Windows XP, Vista, Mac OS,Android,linux
Language	Chinese & English
Sharing	Up to 10 sharing
SMS	Supported
Contact Book	Supported
APN Setting APN	Supported
WIFI Settings WIFI	Supported
Device Settings	Supported
Routing Settings	Supported
Firewall Settings	Supported
Others	
Size	93mm * 60mm * 14mm
Weight	110g

Pictures:



Web Page:

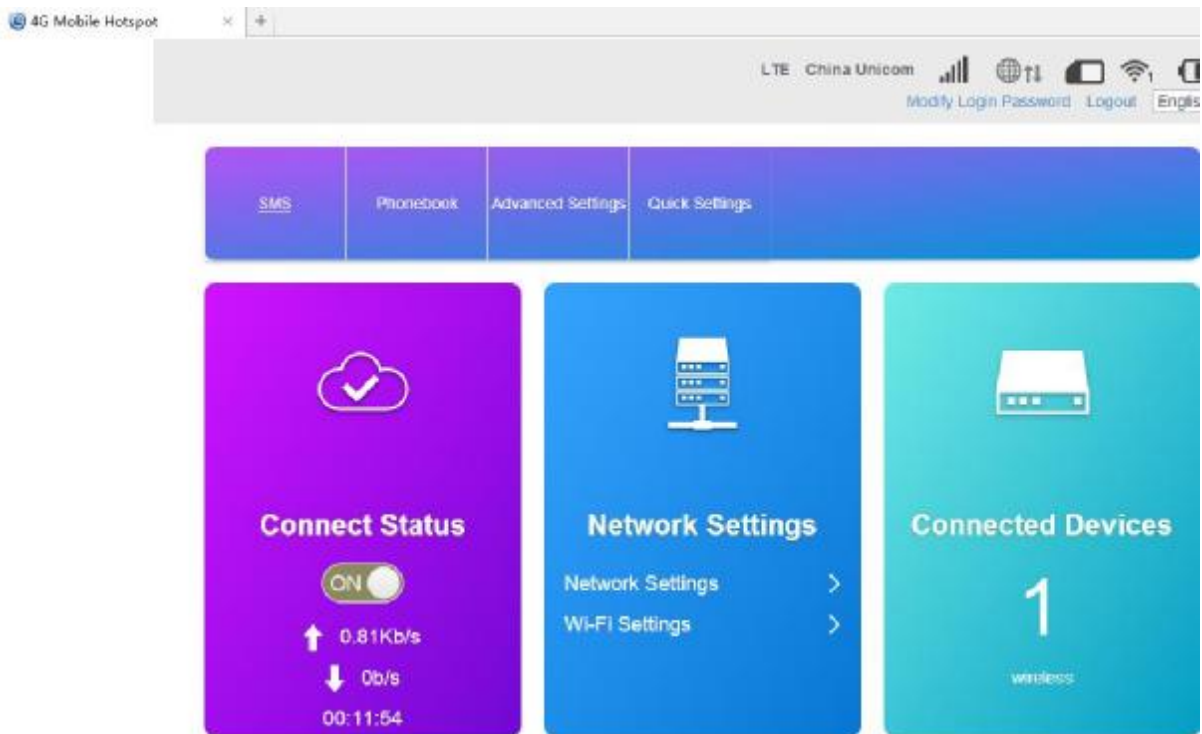

Quick Settings

The wizard will show you how to set up basic parameters of gateway safely. Click "Previous" & "Next" to navigate, and click "Apply" to save settings. For advanced parameters, set them in other menu.

[Next](#)

APN Settings

APN Settings Auto Manual

[?](#)

Advanced Settings

USSD

Power-save Router **USSD** Others

Send to *

[Send](#) [Cancel](#)

Advanced Settings

Router

Power-save **Router** USSD Others

IP Address *

Subnet Mask *

DHCP Server Enable Disable

DHCP IP Pool * -

DHCP Lease Time * hour(s)

[Apply](#)

[?](#)